

# Access Covers & Frames




## Ductile B125

### Design Features

Ductile iron covering a galvanised steel frame.

- Class B125 to EN124:1994
- Design load: 125 kN to EN 124
- Installation area: Group 2 - Footways, pedestrians areas and comparable areas, car parks or car parking decks, and lower groups
- Sealed keyholes
- The words Public Lighting must be cast onto the cover.

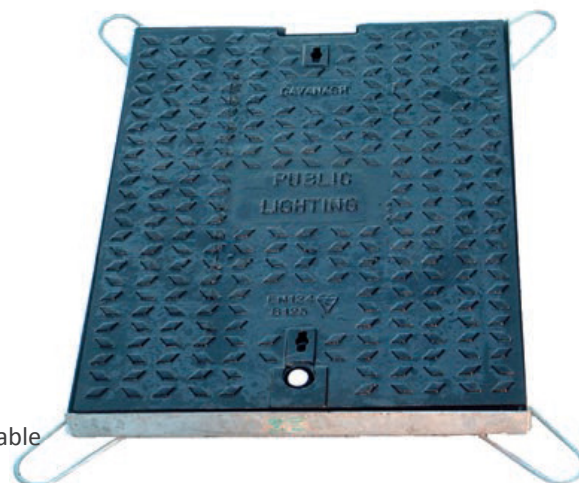

### TECHNICAL FEATURES

- Locking : M16 Zinc plated socket capscrew bolt.
- Frame type : galvanised steel.

### FEATURES

- Standard locking bolts
- Slide out operation
- Third party certified by BSI KM

Clear opening (mm)	562 x 412	730 x 260	915 x 445	1310 x 615
Overall size (L x W x H) (mm)	775 x 625 x 52	920 x 455 x 52	1100 x 640 x 52	1401 x 705 x 52
Mass (kg)	31	27	59	97

### Options

- Customised cover markings available, e.g. company logo or local authority crest
- HDPE Box available
- Can be supplied unlocked

