

Access Covers & Frames

Ductile D400 - CW1 & CW2



VM SKU 10015686 - CW1
VM SKU 10015687 - CW2



Description

The range of D400 Ductile Iron access covers fully comply with BS EN 124:2015 and carry the British Standards Kitemark.

Available options:

- Locking
- Badging
- Ventilation Holes
- Flood and Odour Control Plate
- Safety Grille
- Enhanced Anti-Slip Coating

Dimension




Reference	Clear opening size	Base opening size	Overall frame dimensions	Frame Depth
	CxD (mm)	FxG (mm)	AxB (mm)	E (mm)
CW1	600 x 600	620 x 620	810 x 810	150
CW2	1220 x 675	1245 x 700	1460 x 895	150

Note: The use of road plates is recommended where exposure to construction site traffic is likely.

Available Accessories:

- GritBlocker™ anti-blockage keyway insert
- ScrewLift™ frame levelling system
- ClickLift™ frame raising system
- BS 7903 Lifting Keys

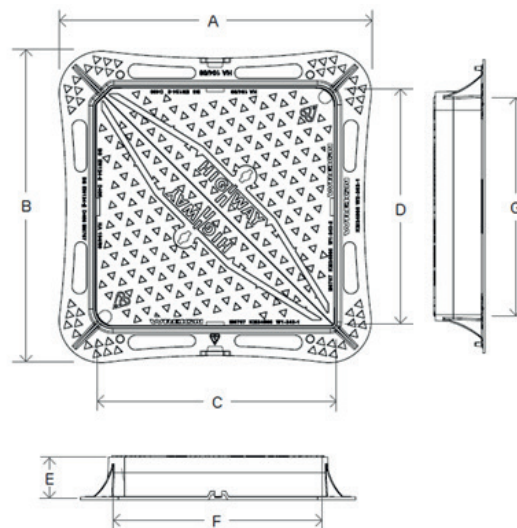

BENEFITS

- For use in a Group 4 D400 class environment
- BS EN 124:2015 and Highways Englands HA104/09 F900
- Manufactured from strong and highly durable ductile iron
- Third party certified by BSI
- Three point suspension on covers for non-rock stability
- Indexed covers ensure correct fitting
- Enlarged frame corners help to dissipate the load
- Non-Rock -three points suspension for non-rock stability
- Safety keyway - ensures key's secure in keyway when lifting
- Mechanical lifting points
- 60+PSRV tested at top surface of chequer by UKAS accredited 3rd party