


# Microduct

14/10mm HDPE Direct Bury  
MiniGlide®  
Virgin Media

VM SKU 10014884

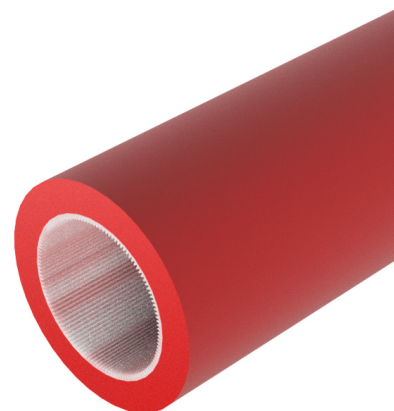


## Description

MiniGlide® direct bury polyethylene tubing providing pathway for mini fibre optic cables.

With permanent low friction solid inner lining for optimised blowing distances.

Can be supplied as single loose tubes or as sheathed assemblies of various configurations.

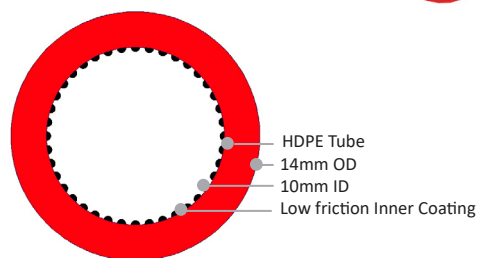

Schematic drawing, not to scale

## Dimensions & Material

Radius Product Code	O.D/I.D Nominal (mm)	O.D Min-Max (mm)	Wall Min- Max (mm)	Weight (g/m)	Min Bend Radius (mm)	Max Long term Tensile (N)	Max Short term Tensile (N)	Ultimate Tensile* (N)	Max Pressure (bar)
TX1358	14/10	13.9-14.1	1.8-2.05	69	210	1000	1100	1250	16

\* at 20°C, 100mm/min

Material	Extruded from 100% prime grade virgin HDPE (High Density Polyethylene) in accordance with ISO1872-1 (ISO1872-2) Class N
Inner Wall	Ribbed inner wall
Low friction	Permanent co-extruded low friction internal coating with coefficient of friction typically less than or equal to 0.09
Colour	Solid red
Operating Temperatures	Transport, Installation and Service -20°C to +60°C Operation (Blowing) -5°C to +35°C
Ovality	3% production 5% on drum

# Microduct

14/10mm HDPE Direct Bury  
MiniGlide®  
Virgin Media

VM SKU 10014884



## Tests

Test	Test Standard	Requirement
Tensile Performance	IEC 60794-1-2-E1	1000N, 10 min, v=50mm/min
Abrasion	IEC 60794-1-2-E2B	4N, 100 cycles
Crush	IEC 60794-1-2-E3	2000N, 60 s, 1h recovery time There shall be no splitting nor permanent damage. Any permanent residual deformation shall not exceed 15%.
Impact	IEC 60794-1-2-E4	1J (rec. 1h)
Torsion	IEC 60794-1-2-E7	10 cycles
Bend & Repeated Bend	IEC 60794-1-21-E11 & E6	D= 40 x OD = 560mm, 25 cycles D= 40 x OD = 560mm, 3 turns Bend radius ≤20 x OD
Kink	IEC 60794-1-2-E10	D= 20 x OD = 280mm
Pressure	IEC 60794-1-22 - F13	2.5xPressure=40bar, 0.5h, 20 °C 1.3xPressure=21bar, 24h, 40 °C
Friction Properties & Lubrication	Radius Inhouse	1.5m of tube is secured with 450° wrap around a 300mm mandrel with one end of the tube hanging downwards. The other end pointing horizontally towards the tensile testing machine. A 2kN twine is installed through the tube and connected to a 5kg weight. The twine shall be pulled at 1000mm/min and travel a minimum of 100mm. The average force of 2 pulls shall be recorded to give a coefficient of friction less than 0.09.

## Marking

The following print (Inkjet) is applied at 1-meter intervals:

- PROPERTY OF VIRGIN MEDIA
- 14/10mm
- Batch Number
- Line Number
- Meter Count

## Packing

Microduct will be shipped on wooden drums. Duct end will be capped off.

Drum size: ø1000x580mm, maximum 3 drum/pallet

## Delivery Lengths

1500m drum length.