

Access Covers & Frames



**RADIUS**  
CTS

Ductile B125

Description

Ductile iron covering a galvanised steel frame.

- Class B125 to EN124:1994
- Design load: 125 kN to EN 124
- Installation area: Group 2 - Footways, pedestrians areas and comparable areas, car parks or car parking decks, and lower groups
- Sealed keyholes
- The words Public Lighting must be cast onto the cover.

Technical Features

- Locking : M16 Zinc plated socket capscrew bolt.
- Frame type : galvanised steel.




FEATURES

- Standard locking bolts
- Slide out operation
- Third party certified by BSI KM

Clear opening (mm)	562 × 412	730 × 260	915 × 445	1310 × 615
Overall size (L x W x H) (mm)	775 × 625 × 52	920 × 455 × 52	1100 × 640 × 52	1401 × 705 × 52
Mass (kg)	31	27	59	97

Options

- Customised cover markings available, e.g. company logo or local authority crest
- HDPE Box available
- Can be supplied unlocked

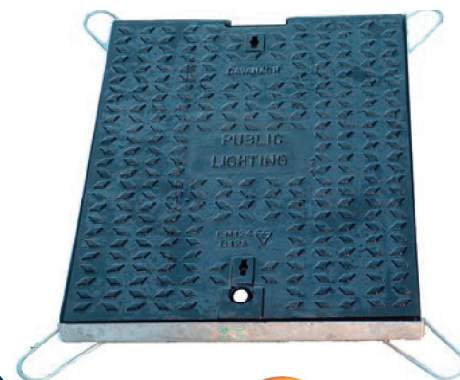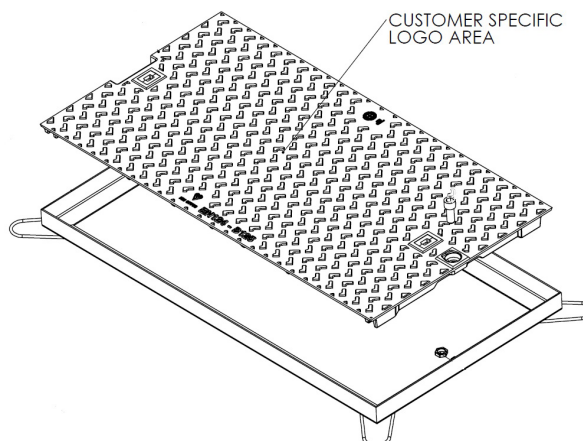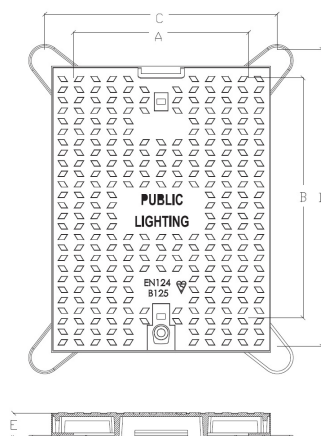

B125