


Main Duct



RADIUS
CTS

Prime PE100 Cable Duct
HDD
Suitable for Welding

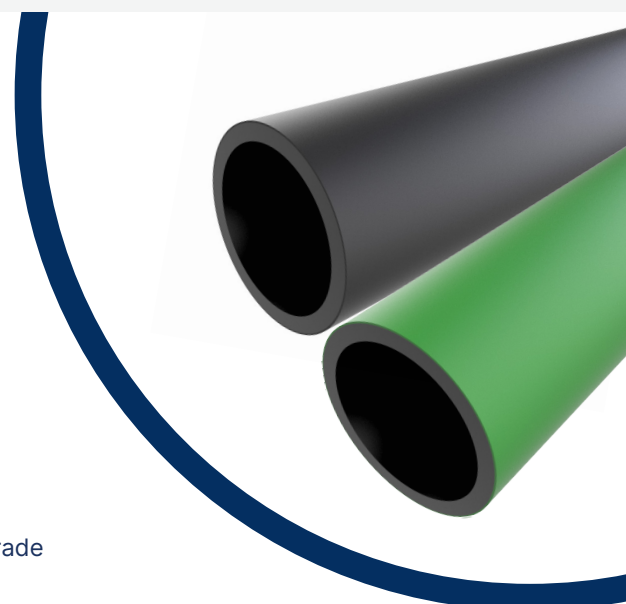

Description

A range of solid, smooth wall cable ducts manufactured from PE100 prime grade material in accordance with BS EN 61386-24:2010.

These cable ducts are suitable for Horizontal Directional Drilling (HDD) and can be joined by butt fusion or electrofusion welding.

Dimensions & Material

- Prime Grade PE 100 material - see typical properties overleaf
- Solid black colour or black with coloured outersheath skin
- Smooth inner wall
- Operating Temperature: Transport, Storage and Installation -10°C to +50°C
Service -20°C to +75°C
- Supplied square ended for butt fusion welding
- Can also be mechanically jointed providing that the ends are chamfered on the outside edge by the installer
- Supplied in lengths and coils


O.D. Nominal (mm)	I.D. Nominal (mm) SDR13.6	I.D. Nominal (mm) SDR11	I.D. Nominal (mm) SDR9
90	76	73	69
110	93	89	84
125	106	101	95
160	136	130	123
180	153	146	140
200	170	162	153
225	192	182	174
250	212	202	192
315	267	256	242

Main Duct

Prime PE100 Cable Duct
HDD
Suitable for Welding



RADIUS
CTS

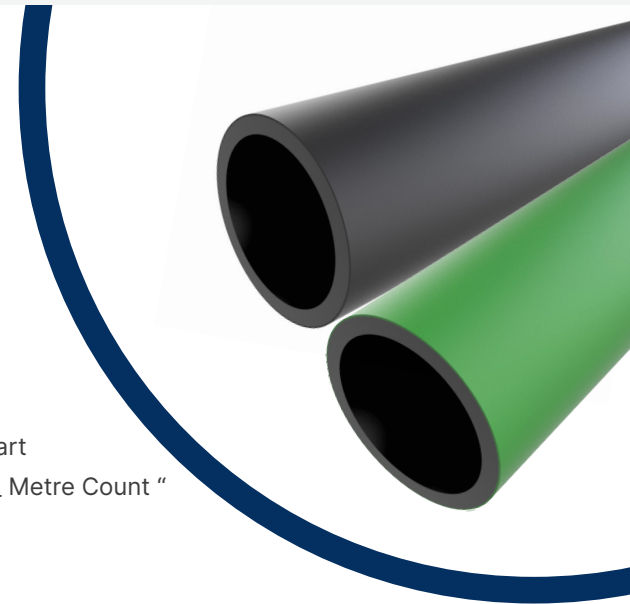

Marking

- Every Metre, Contrasting colour, Thermal or Inkjet, 2 print lines, 180° apart
 - "FIBRE OPTIC CABLE DUCT_RADIUS_XXmm SDRXX_ Batch No_ Line No_ Metre Count "
- Customer specific print is optional.

Typical Material Properties

High-density polyethylene copolymer designed for the extrusion of large diameter pipes. It is classified PE 100 in accordance with ISO 12162 based on ISO 9080 analysis.

Characteristics

- PE 100 Black pipe compound

Properties	Test Method	Values	Unit
Physical			
Density (pigmented)	ISO 1183/A	959	kg/m ³
Melt Flow Rate (5kg/190°C, Condition T)	ISO 1133	0.3	g/10min
Mechanical			
Tensile Strength @ Yield (23°C @ 50 mm/min)	ISO 527-2	23	MPa
Tensile Elongation @ Break (23°C @ 50 mm/min)	ISO 527-2	>350	%
Tensile Modulus (23°C @ 1 mm/min)	ISO 527-2	1100	MPa
Thermal			
VICAT Softening Point (1kg)	ISO 306	128	°C
Thermal Stability (OIT, 210°C)	ISO 10837	>20	min
Pigmentation			
Carbon Black Dispersion	ISO 18553	<3	Grade
Carbon Black Content	ISO 6964	2 to 2.5	%

Supply Configuration

- Lengths: 6m, 12m, 13.5m
15m available with surcharge and subject to road/traffic permissions.
- Coils: Available for up to 180mm O.D.