


# Access Covers & Frames



## Composite Covers

**B125**

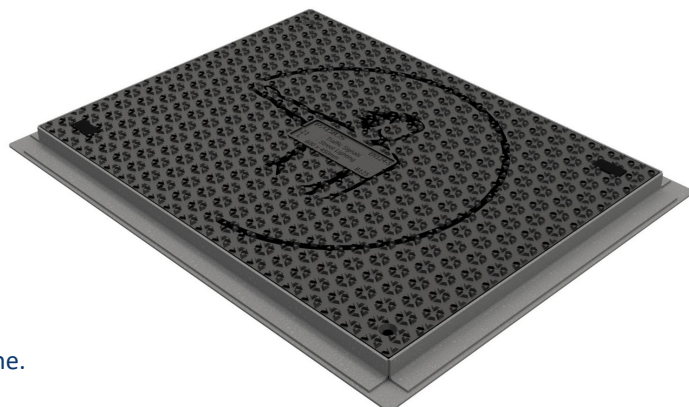

### Design Features

Radius high quality composite cover with galvanised steel frame.

Unique tread pattern with high slip resistance.

- Slip resistant, tested according to BS EN 7976-2+A1-2013 and UKSRG Guidelines 2016
- Manufactured to BS EN 124-5 rating B125
- Installation area: Group 2 - Footways, pedestrians areas and comparable areas, car parks or car parking decks, and lower groups

### FEATURES

- anti-slip composite
- resistant to chemicals, deformation, rust and corrosion
- no inherent scrap value
- rising frame
- Integral lifting keyholes
- badged 'Traffic Signals' & 'Street Lighting' as standard\*

\*Bespoke badging available depending on MOQ

### Technical Features

- 50 mm deep rising frame : 3mm galvanised steel to BS EN ISO 1461
- Stainless steel Allen key locking as standard, security locking available

Nominal Size* (mm)	Frame Clear Opening (mm) A	Actual Cover (mm) B	Rising Frame Skirt (mm) C	Overall Dimension (mm) D	Combined Weight (kg)	Product Code
300 x 300	284 x 284	310 x 310	290 x 290	384 x 384	9.95	UY1551
450 x 300	434 x 284	468 x 317	440 x 290	534 x 384	13.75	UY1552
450 x 450	434 x 434	468 x 468	440 x 440	534 x 534	18.95	UY1553
600 x 450	584 x 434	617 x 468	590 x 440	684 x 534	22.95	UY1554
600 x 600	584 x 584	617 x 617	590 x 590	684 x 684	29.2	UY1555
750 x 750	780 x 780	780 x 780	740 x 740	854 x 854	46.7	UY1556

\* Other sizes available on request

Skid Resistance	
Test	PTV
Dry Testing (mean value)	84
Wet Testing (mean value)	69

