



Microduct Assembly

12/9.6mm
LSZH



Description

LSZH Indoor MiniGlide™ is a reduced fire hazard assembly consisting of a specified number of 12/9.6mm MiniGlide™ LSZH – Low Smoke Zero Halogen – low friction tubes assembled together with a LSZH sheath.

This assembly is suitable for indoor applications where fire retardant properties are required.

Primary Tube


- Low Toxic Gas Emission, Low Smoke Generation, ZERO % Halogen Content (chlorine, bromine, fluorine) according to IEC 60754-1
- Euroclass rating: B2 ca s1a d2 a1 (Indicative Result)
- Smooth inner wall as standard
- White solid as standard - colour optional
- Number coded for ease of identification

O.D./I.D Nominal (mm)	O.D (mm)	Wall Min-Max (mm)	Bend Radius (mm)	Max Tensile (N)	Max Pressure (bar)	Reference
12/9.6	11.95-12.1	1.0-1.2	240	205	12	TS_MDT_12-9.6mm LSZH
Classification Code DIN EN 61386-22: 2-1-2-1-2-2-0-0-0-1-0						

Assembly

- Configuration: 1,2,4,7 way
- Outer sheath: material designed for Low Flammability, Low Toxic Gas Emission, Low Smoke Generation, No Halogen Content
- Outer Sheath Material Flammability: DIN EN 60332-1-2:2004 + A11:2016, DIN EN 50339:2011 + A1:2016
- Outer sheath colour: White as standard - colour optional
- Ripcord: for removal of sheath

Configuration	O.D. Nominal (mm)	Weight (g/m)	Bend Radius (mm)	Max Tensile (N)
1	13.8	115	280	390
2	25.8 x 13.8	209	280	700
4	30.5 x 25.5	360	520	1210
7	37.8 x 34.6	584	695	1930

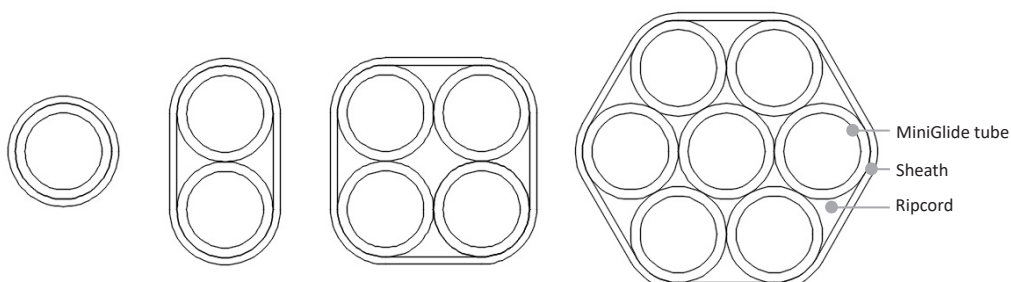

Schematic drawing, not to scale

Microduct Assembly

12/9.6mm
LSZH



Tests

Type Test	Test Standard	Requirement
Tensile Performance	IEC 60794-1-2-E1	Specified tensile load, 10 min, v=100mm/min
Abrasion	IEC 60794-1-2-E2B	4N, 100 cycles
Crush	IEC 60794-1-2-E3	500 N shall be applied for 60 seconds, then removed. There shall be no splitting nor permanent damage. Any permanent residual deformation shall not exceed 15%.
Impact	IEC 60794-1-2-E4	3J (rec 1h.)
Bend & Repeated bend	IEC 60794-1-21-E11 & E6	D=40xOD 25 cycles D=40xOD 3 turn Bend radius ≤ 20xOD
Kink	IEC 60794-1-2-E10	D=20xOD
Ripcord Removal	Radius Inhouse	500mm sample lengths shall be cut and conditioned at -10°C for 2 hours. After conditioning, the ripcord will split the inner sheath without snapping

Marking

The following print is applied at 1-meter intervals:

- Supplier: RADIUS
- Product Description (e.g 7 way 12/9.6mm LSZH)
- Batch Number
- Meter Count
- Line Number

Customer specific print is optional

Packing

Microduct will be shipped on either disposable wooden drums, treated wooden drums or metal drums.
Duct assembly end will be capped off.

Delivery Lengths

Available in various drum lengths typically 500m, 1000m and 2000m depending on product configuration.
Drum lengths to be agreed at the time of order.