

Electric Cable Duct

TWINWALL DUCT 63mm HDPE - 450 N

VM SKU 10015392/10015393
(6m) (50m)




Description

TwinWall is a high quality main duct system providing excellent cable protection and fast underground installation of electric and utility networks.

TwinWall corrugated primary duct is extruded from high-density polyethylene (HDPE) in accordance with BS EN 61386-24:2010. Corrugated on the outside, smooth on the inside, TwinWall HDPE duct has a high static and dynamic load bearing capacity combined with high impact resistance. The smooth inner bore combined with the lower frictional coefficient of HDPE, reduces the effort required to install long lengths of sub-duct and cable.

This twinwall product is supplied complete with a coupler.

- 450N compression resistance
- BSI Kitemark
- Green colour

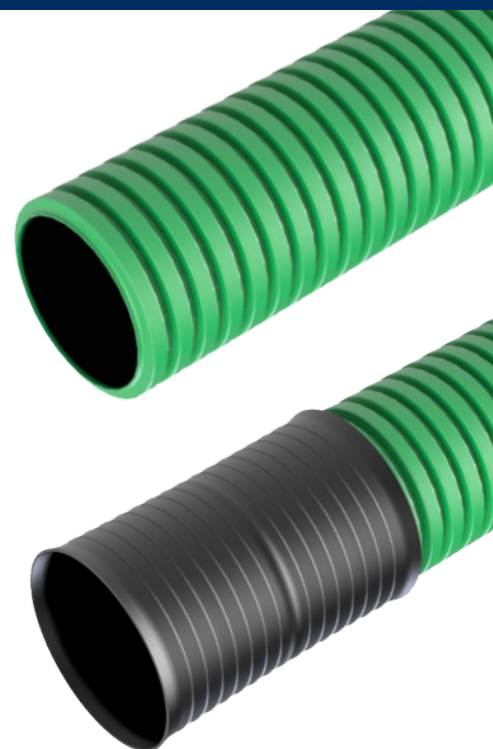

Technical information

Radius Code	Nominal O.D. (mm)	O.D. Tolerance (mm)	Nominal I.D. (mm)	Ovality (mm)	Crush (N)	Nominal Length (m)	Pack Qty. (Lengths/Coils)
CX0369	63	-0, +0.9	50	1.0	450	6	108
CX0394	63	-0, +0.9	50	1.0	450	50	6

Marking

The following print is applied at every metre:

- RADIUS
- 63MM 450N
- Batch Number
- Line Number

Customer specific print available as required.

Packaging

Supplied in non-returnable wooden U-Frames to be stored on even ground, pallets must not be stored more than 3 high.